

## LEDincand A60



### Features

- Incandescent, but LED
- Short filament with incandescent performance
- Light around 360 degree, no shadow On top and down side
- Switch driver
- Long Span life up to 25,000 hours

### Applications

- Home, villa and other residential buildings
- Shopping mall, Hotels, restaurants, bars, cafes

## Product Overview


Part No.	LEDincand A60 KP40T4	LEDincand A60 KP60T7
Wattage (W)	4.5	7
Incandescent Equivalent (W)	40	60
Dimmable	No	No
Socket	E27	E27
Lumens (lm) by 90°	470	810
Luminous intensity(cd)	N/A	N/A
Energy efficiency class	A+	A+
PF	>0.5	>0.5
CCT (K)	2700	2700
CRI (Ra)	80	80
Voltage (V)	AC220-240V	AC220-240V
Current (mA)	39	
Frequency(Hz)	50/60	50/60
Beam Angle (deg)	360	360
Lifespan(hrs)	100000 Switching Cycles	100000 Switching Cycles
Working Temperature (°C)	-20 ~ 40	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60	-20 ~ 60
EAN Code	40 6057410017	40 6057410017

## LEDincand A60

Weight (g)	30.5
Lamp Length (mm) - C/L	104
Max. Lamp Diameter (mm) - D	60
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	Box
Single package dimensions (L x W x H) (cm)	60 X 105 / 1PCS
Inner package dimensions (L x W x H) (cm)	335 x 140 x 125 / 10PCS
Outer package dimensions (L x W x H) (cm)	720 x 350 x 270 / 100PCS

- \* Do not use in sealed luminaire.
- \* Power off when replacement
- \* Do not touch when lighting

## Technical Drawings

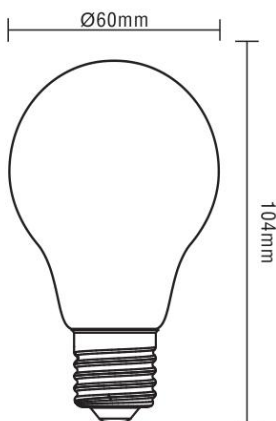

## Energy Label

