

LEDincand C35



Features

- Incandescent, but LED
- Short filament with incandescent performance
- Light around 360 degree, no shadow On top and down side
- Switch driver
- Long Span life up to 25,000 hours

Applications

- Home, villa and other residential buildings
- Shopping mall, Hotels, restaurants, bars, cafes

Product Overview


Part No.	LEDincand C35 KP40T4	LEDincand C35 KP25T3
Wattage (W)	4.5	3
Incandescent Equivalent (W)	40	25
Dimmable	No	No
Socket	E14	E14
Lumens (lm) by 90°	470	250
Luminous intensity(cd)	N/A	N/A
Energy efficiency class	A+	A+
PF	>0.5	>0.5
CCT (K)	2700	2700
CRI (Ra)	80	80
Voltage (V)	AC220-240V	AC220-240V
Current (mA)		
Frequency(Hz)	50/60	50/60
Beam Angle (deg)	360	360
Lifespan(hrs)	100000 Switching Cycles	100000 Switching Cycles
Working Temperature (°C)	-20 ~ 40	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60	-20 ~ 60
EAN Code	40 6057410007	40 6057410007

LEDincand C35

Weight (g)	13.5
Lamp Length (mm) - C/L	105
Max. Lamp Diameter (mm) - D	35
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	Box
Single package dimensions (L x W x H) (mm)	35 X 105 / 1PCS
Inner package dimensions (L x W x H) (mm)	210 x 90 x 135 / 10PCS
Outer package dimensions (L x W x H) (mm)	470 x 225 x 295 / 100PCS

- * Do not use in sealed luminaire.
- * Power off when replacement
- * Do not touch when lighting

Technical Drawings

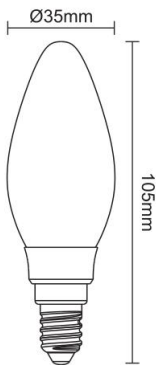

Energy Label

