CIVILIGHT

# 6W HALED PRO WGU10 345lm

## HALED PRO WGU10 KC50T6

RoHS CE

## Features

- Special HALED design with Anti-Glare Lens and Reflector
- High CRI with Ra95
- Switching power supply
- CE and RoHS compliant
- Pefect dimming function
- 85% energy saving

## Applications

- Home, villa and other residential buildings
- Shopping mall, Hotels, restaurants, bars, cafes

## Product Overview

| | |
|---|---|
| Part No. | HALED PRO WGU10 KC50T6-25620 |
| Wattage (W) | 6 |
| Incandescent Equivalent (W) | 50 |
| Dimmable | DTW |
| Socket | GU10 |
| Lumens (lm) by 90° | 345 |
| Luminous intensity(cd) | 900 |
| Energy efficiency class | A |
| PF | >0.9 |
| CCT (K) | 2700-2100 |
| CRI (Ra) | 95 |
| Voltage (V) | AC200-240V |
| Current (mA) | 35 |
| Frequency(Hz) | 50 |
| Beam Angle (deg) | 24/36/60 |
| Lifespan(hrs) | 40000 |
| Working Temperature (℃) | -20 ~ 40 |
| Storage Temperature (℃) | -20 ~ 60 |
| EAN Code | 40 6057425620 |

# 6W HALED PRO DGU10

## HALED PRO WGU10 KC50T6

## Physical data

| | |
|---|---|
| Weight (g) | 47 |
| Lamp Length (mm) - C/L | 56 |
| Max. Lamp Diameter (mm) - D | 50 |
| Lamp dimension equal to filament lamp equivalent | Yes |
| Designed for optimum use in non standard conditions | No |
| Fluorescent lamp replacement | No |
| Single packaging type | Box |
| Single package dimensions (L x W x H) (cm) | 55 x 55 x 68 / 1PCS |
| Inner package dimensions (L x W x H) (cm) | 290 x 118 x 88 / 10PCS |
| Outer package dimensions (L x W x H) (cm) | 615 x 305 x 196 / 100PCS |

* Compatible dimmer: Busch Jaeger 6517U-101 / Merten MEG5133 / GIRA 030000/IT01
* Do not use in close luminaire.

## Technical Drawings

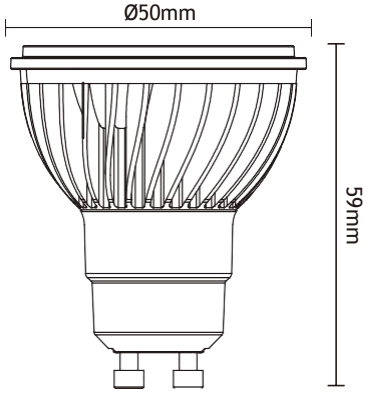

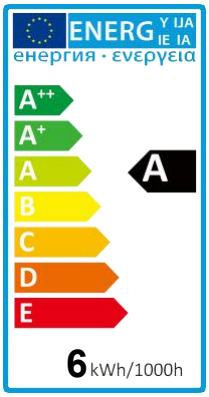
## Energy Label