

LEDincand pro WA60 KP40T5



Features

- Incandescent, but LED
- Dim to Warm(2700-2100K)
- Switching power supply
- Light around 360 degree,no shadow on top and down side
- Long span life up to 25,000 hours

Applications

- Home, villa and other residential buildings
- Shopping mall, Hotels, restaurants, bars, cafes

Product Overview

Part No.	LEDincand pro WA60 KP40T5-10031
Wattage (W)	5
Incandescent Equivalent (W)	40
Dimmable	Dim to warm
Socket	E27
Lumens (lm) by 90°	470
Luminous intensity(cd)	N/A
Energy efficiency class	A+
PF	>0.5
CCT (K)	2700-2100
CRI (Ra)	80
Voltage (V)	AC220-240V
Current (mA)	39
Frequency(Hz)	50/60
Beam Angle (deg)	360
Lifespan(hrs)	20000/100000 Switching Cycles
Working Temperature (°C)	-20 - 40
Storage Temperature (°C)	-20 - 60
EAN Code	40 6057410031

LEDincand pro WA60 KP40T5


Physical data

Weight (g)	30.5
Lamp Length (mm) - C/L	104
Max. Lamp Diameter (mm) - D	60
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	Box
Single package dimensions (L x W x H) (cm)	60 X 105 / 1PCS
Inner package dimensions (L x W x H) (cm)	335 x 140 x 125 / 10PCS
Outer package dimensions (L x W x H) (cm)	720 x 350 x 270 / 100PCS

* Compatible dimmer: Busch Jaeger 6517U-101 / Peha 436 / GIRA2262000/IT01

* Do not use in close luminaire.

Technical Drawings

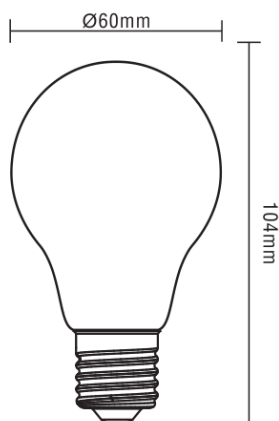

Energy Label

