

LEDincand Soft DC35 KP15T3



Features

- Soft filament
- Similar design to traditional bulb
- Perfect decoration
- Dimmable design with switch driver
- Long span life up to 25,000 hours

Applications

- Decorative luminaries
- Perfect design solution for crystal chandelier application
- Hatels, restaurants, bars

Product Overview

| | |
|-----------------------------|----------------------------|
| Part No. | LEDincand Soft DC35 KP15T3 |
| Wattage (W) | 3 |
| Incandescent Equivalent (W) | 15 |
| Dimmable | Yes |
| Socket | E14 |
| Lumens (lm) by 90° | 136 |
| Luminous intensity(cd) | N/A |
| Energy efficiency class | A+ |
| PF | >0.7 |
| CCT (K) | 2200 |
| CRI (Ra) | 80 |
| Voltage (V) | AC220-240V |
| Current (mA) | 18 |
| Frequency(Hz) | 50 |
| Beam Angle (deg) | 360 |
| Lifespan(hrs) | 100000 Switching Cycles |
| Working Temperature (°C) | -20 - 40 |
| Storage Temperature (°C) | -20 - 60 |
| EAN Code | 40 6057411039 |

LEDincand Soft DC35 KP15T3

Physical data


| | |
|---|---------------------|
| Weight (g) | 15 |
| Lamp Length (mm) - C/L | 105 |
| Max. Lamp Diameter (mm) - D | 35 |
| Lamp dimension equal to filament lamp equivalent | Yes |
| Designed for optimum use in non standard conditions | No |
| Fluorescent lamp replacement | No |
| Single packaging type | Box |
| Single package dimensions (L x W x H) (mm) | 35 X 105 / 1PCS |
| Inner package dimensions (L x W x H) (mm) | ? / 10PCS |
| Outer package dimensions (L x W x H) (mm) | 480*235*258/ 100PCS |

* Not recommend to use in fully sealed fixture

* Power off when replacement

* Do not touch when lighting

Technical Drawings

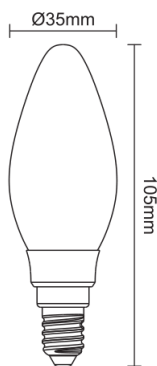

Energy Label

