

## Features

- Driver inside, easily assemble, and replace halogen bulbs directly.
- Metal heat dissipation exterior casing.
- Equals to 50W halogen bulb.
- High PF value, no flicker, dimmable triac.
- HALED optical design, low UGR value, CRI90
- Lifespan 40000 hrs, 5 years warranty.
- CE& RoHS
- High energy efficiency
- appearance: Titanium




## Applications

- Home appliance and other residential decorations.
- Commercial lighting like hotels, restaurants, bars, cafes, etc.

## Product overview


Part No.: DCVM001W06	Wattage: 6W	Dimmable: Yes
Codo No: 47506 / 47502		
CCT/Lumen output: 3000K/400lm		Energy efficiency class: G
PF: >0.8	CRI(Ra): 90	Weight: 80g
Voltage: AC200-240V	Current: 30mA	Frequency: 50/60Hz
Beam Angle (deg): 36° / 24°	Working Temperature: -20°C ~ - 40°C	Storage Temperature: -20°C ~ 50°C
Inner Box Dimensions	Outer Carton Dimensions	Qty: 100PCS
(LxWxH): 50*50*40mm	(LxWxH): 580*285*185mm	

Beam Angle 24° cd&lx

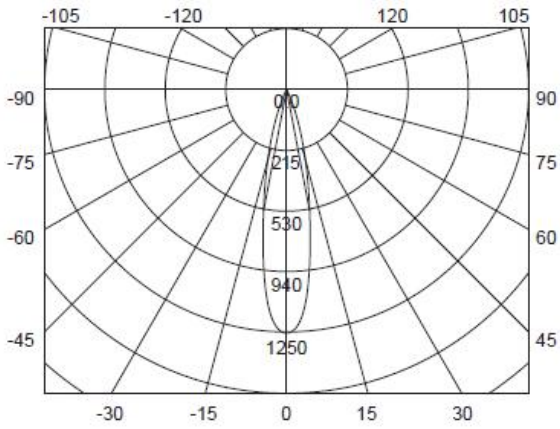


0.5m	3512/4028lx	20.98cm
1.0m	1076.2/1260.5lx	41.78cm
1.5m	663.48/704.22lx	62.67cm
2.0m	495.21/534.51lx	83.56cm
3.0m	287.19/301.96lx	125.34cm

Beam Angle 36° cd&lx

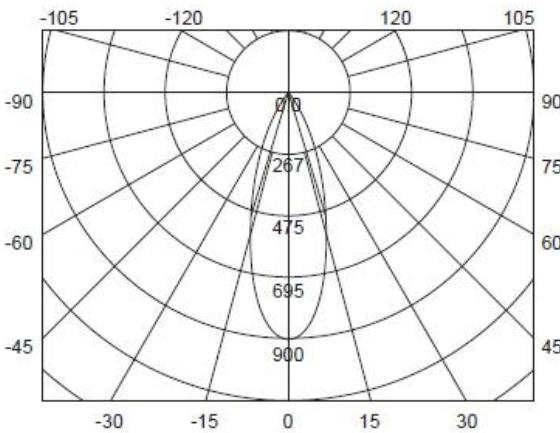

0.5m	2462/3712lx	30.86cm
1.0m	592.4/12.5lx	61.72cm
1.5m	269.11/402.31lx	92.58cm
2.0m	149.79/234.61lx	123.44cm
3.0m	68.98/99.89lx	185.16cm

Technical Drawings (L/N wire 240mm)

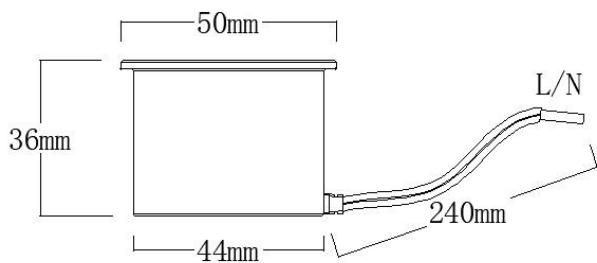

Packaging diagram



Inner Box



Middle Box



Outer Carton

Outer Carton Dimensions: (LxWxH): 580\*285\*185mm, Qty: 100PCS

**Cautions**

- Don't touch the lamp when it is lighted
- Don't use it in enclosed luminaire
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.

