

Features

- Driver inside, easily assemble, and replace halogen downlight directly.
- Metal heat dissipation exterior casing.
- Equals to 50W halogen bulb.
- High PF value, no flicker.
- Dim to Warm is an embedded Lumenpulse Technology that reduces a luminaire's colour temperature when dimmed, allowing for smooth variations in warm white light. The dimming process is the same as halogen bulb performs.
- HALELED optical design, low UGR value, CRI90
- Lifespan 40000 hrs, 5 years warranty.
- CE& RoHS
- High energy efficiency
- appearance: Nickel



Applications

- Home appliance and other residential decorations.
- Commercial lighting like hotels, restaurants, bars, cafes, etc.
- Office lighting and Government building lighting

Product overview

Part No.: WCV002W06

Wattage: 6W

Dimmable: Dim to Warm

Codo No: 48134 / 48133

CCT/Lumen output: 2700K-2100K/400lm

Energy efficiency class: G

PF: >0.8

CRI(Ra): 90

Weight: 120g

Voltage: AC200-240V

Current: 33mA

Frequency: 50/60Hz

Beam Angle (deg): 36° / 24°

Working Temperature: -20°C ~ - 40°C

Storage Temperature: -20°C ~ 50°C

Inner Box Dimensions



Outer Carton Dimensions

Qty: 100PCS



(LxWxH): 100*90*45mm

(LxWxH):625*255*180mm


Beam Angle 24° cd&lx

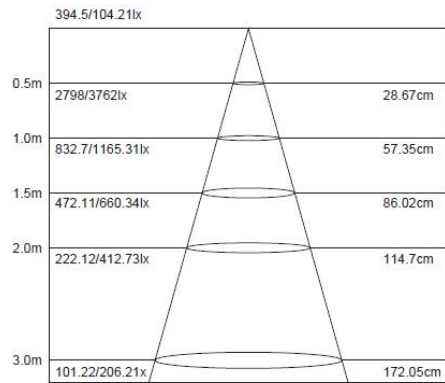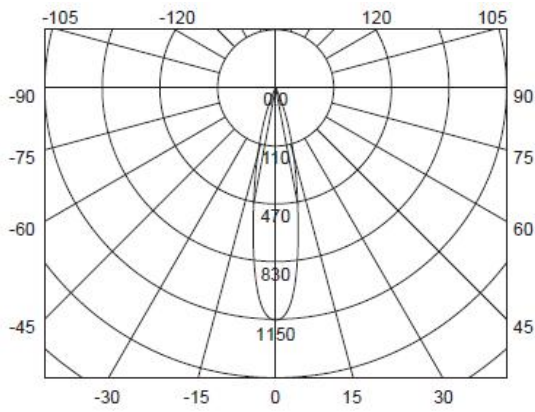

Beam Angle 36° cd&lx

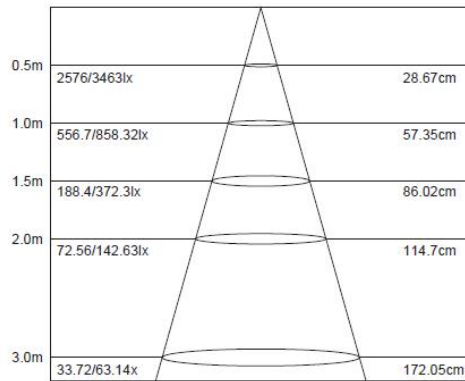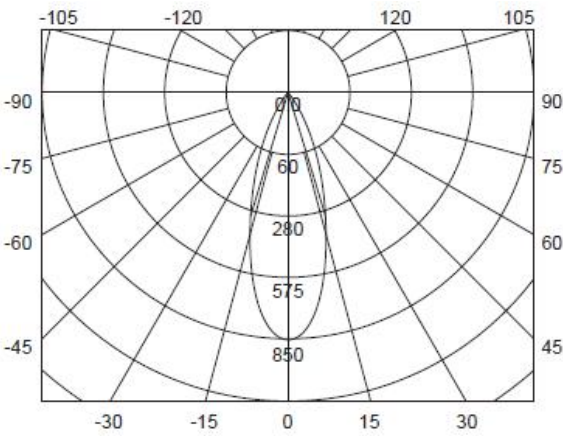

Technical Drawings (L/N wire 240mm)

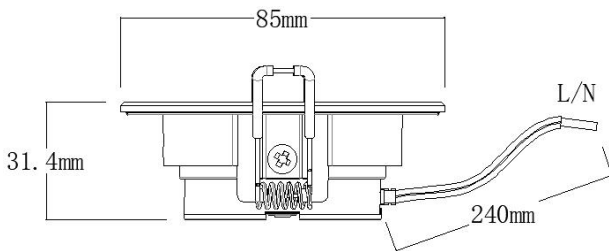

Packaging diagram



Inner Box




Middle Box



Outer Carton

Outer Carton Dimensions: (LxWxH): 625*255*180mm, Qty: 100PCS

Installation diagram

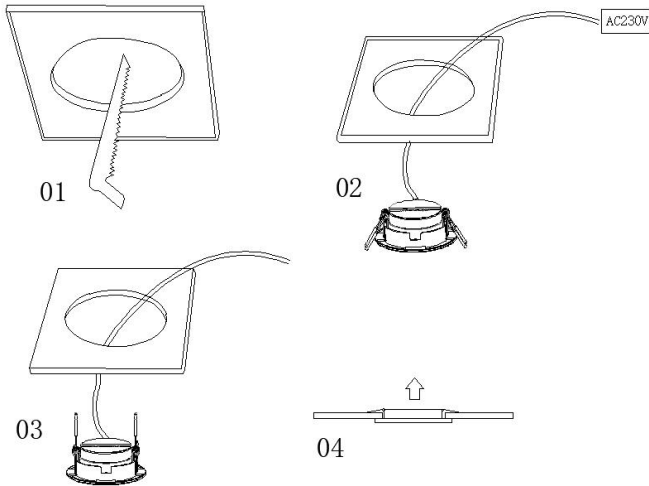

Cautions

- Don't touch the lamp when it is lighted
- Don't use it in enclosed luminaire
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.

