

Features:

- Traditional halogen bulb appearance.
- Equals to 75W halogen bulb.
- High PF value, no flicker, dimmable triac.
- HALELED optical design, low UGR value, CRI90
- Easily assemble, and replace halogen bulbs directly.
- Lifespan 25000 hrs, 3 years warranty.
- CE& RoHS
- High energy efficiency



Applications

- Home appliance and other residential decorations.
- Commercial lighting like hotels, restaurants, bars, cafes, etc.

Product overview

Part No.: DGU10 KP75T6

Wattage: 6W

Dimmable: Yes

Codo No: 22810 / 22814

CCT/Lumen output: 3000K/500lm

Energy efficiency class: G

PF: 0.8

CRI(Ra): 90

Weight: 46g

Voltage: AC200-240V

Current: 33mA

Frequency: 50/60Hz

Beam Angle: 36° / 24°

Socket: GU10

Working Temperature : -20°C ~ - 50°C

Inner Box Dimensions


Outer Carton Dimensions

Qty: 100pcs/carton

(LxWxH): 55 x 55 x 65mm


(LxWxH): 580 x 285 x 185mm

Beam Angle 24° cd&lx

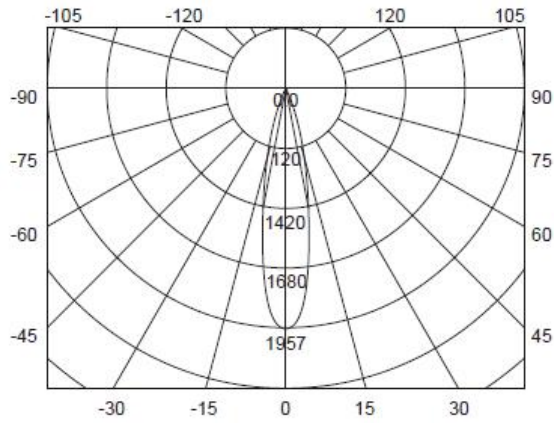


0.5m	5077/7010lx	22.17cm
1.0m	1464/1957lx	44.34cm
1.5m	830.7/1045.91lx	66.51cm
2.0m	598.66/719.51lx	86.68cm
3.0m	332.96/484.21lx	133.02cm

Beam Angle 36° cd&lx

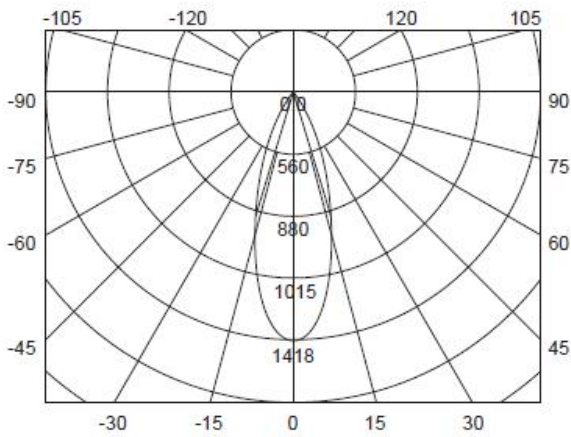

0.5m	3353/5354lx	32.49cm
1.0m	913/1418lx	64.98cm
1.5m	461.84/672.91lx	97.48cm
2.0m	303.2/422.11lx	129.97cm
3.0m	190.34/243.11lx	194.95cm

Technical Drawings (mm)

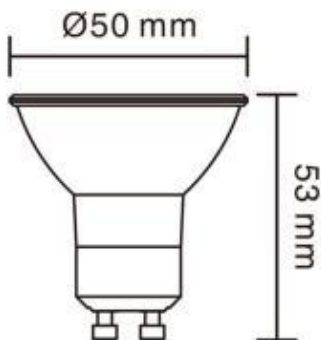

Packaging diagram



Inner Box



Middle Box



Outer Carton

Outer Carton Dimensions: (LxWxH): 580*285*185mm, Qty: 100PCS

Cautions

- Don't touch the lamp when it is lighted
- Don't use it in enclosed luminaire
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.

