

Features:

- Traditional halogen bulb appearance.
- Equals to 50W halogen bulb.
- Dim to Warm is an embedded Lumenpulse Technology that reduces a luminaire's colour temperature when dimmed, allowing for smooth variations in warm white light. The dimming process is the same as halogen bulb performs.
- HALELED optical design, low UGR value, CRI90
- Easily assemble, and replace halogen bulbs directly.
- Lifespan 25000 hrs, 3 years warranty.
- CE& RoHS
- High energy efficiency




Applications

- Home appliance and other residential decorations.
- Commercial lighting like hotels, restaurants, bars, cafes, etc.

Product overview


Part No.:WGU10 KC50T6	Wattage: 6W	Dimmable: Dim to Warm
Code No: 22787 / 22749		
CCT/Lumen output: 2700K-2100K/345lm		Energy efficiency class: G
PF: 0.8	CRI(Ra): 90	Weight: 46g
Voltage: AC200-240V	Current: 30mA	Frequency: 50/60Hz
Beam Angle: 36° / 24°	Socket: GU10	Working Temperature :-20°C ~ 50°C
Inner Box Dimensions	Outer Carton Dimensions	Qty: 100pcs/carton
(LxWxH):55 x 55 x 65mm	(LxWxH):580 x 285 x 185mm	

Beam Angle 24° cd&lx

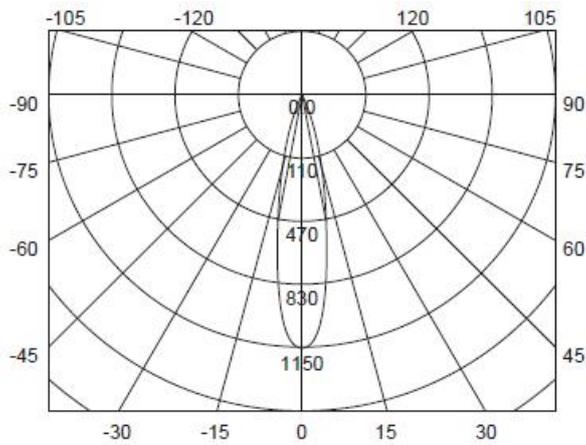


Distance (m)	Beam Diameter (cm)	Center Lux (lx)	Edge Lux (lx)
0.5m	28.67cm	2798/3762lx	394.5/104.21lx
1.0m	57.35cm	832.7/1165.31lx	
1.5m	86.02cm	472.11/660.34lx	
2.0m	114.7cm	222.12/412.73lx	
3.0m	172.05cm	101.22/206.21lx	

Beam Angle 36° cd&lx

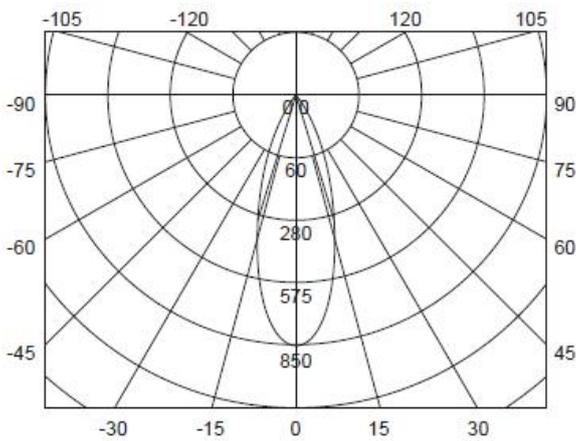

Distance (m)	Beam Diameter (cm)	Center Lux (lx)	Edge Lux (lx)
0.5m	28.67cm	2576/3463lx	
1.0m	57.35cm	556.7/858.32lx	
1.5m	86.02cm	188.4/372.3lx	
2.0m	114.7cm	72.56/142.63lx	
3.0m	172.05cm	33.72/63.14lx	

Technical Drawings (mm)



Packaging diagram



Inner Box



Middle Box



Outer Carton

Outer Carton Dimensions: (LxWxH): 580*285*185mm, Qty: 100PCS

Cautions

- Don't touch the lamp when it is lighted
- Don't use it in enclosed luminaire
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.

