HALED III DGU10 WC50T6-25622/25639

CIVILIGHT

Features：

- Metal heat dissipation exterior casing
- Equals to 50W halogen bulb.
- High PF value, no flicker, dimmable triac.
- HALED optical design, low UGR value, CRI95
- Easily assemble, and replace halogen bulbs directly.
- Lifespan 40000 hrs, 5 years warranty.
- CE& RoHS
- High energy efficiency
- appearance: Titanium

Applications

- Home appliance and other residential decorations.
- Commercial lighting like hotels, restaurants, bars, cafes, etc.

Product overview

Part No.: DGU10 WC50T6 Code No：25622 / 25639	Wattage: 6W	Dimmable: Yes
CCT/Lumen output: 3000K/345lm		Energy efficiency class: G
PF: >0.85	CRI(Ra):95	Weight: 47g
Voltage: AC200-240V	Current: 33mA	Frequency: 50/60Hz
Beam Angle: 36° / 24°	Socket: GU10	Working Temperature :-20℃ ~ 50℃
Inner Box Dimensions (LxWxH):55 x 55 x 65mm	Outer Carton Dimensions (LxWxH):580 x 285 x 185mm	Qty：100PCS

Beam Angle 24° cd&lx

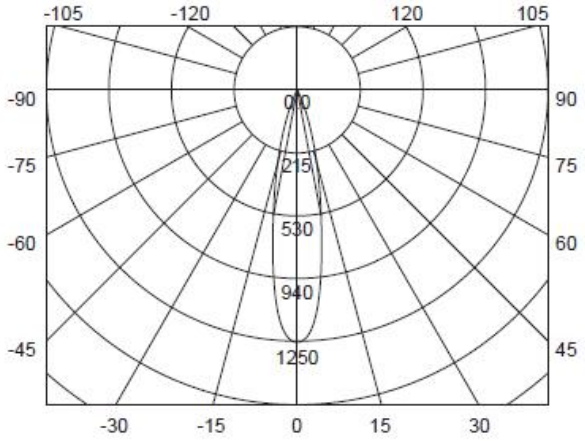

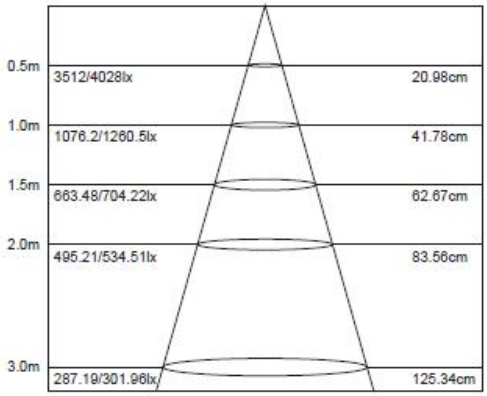

Beam Angle 36° cd&lx

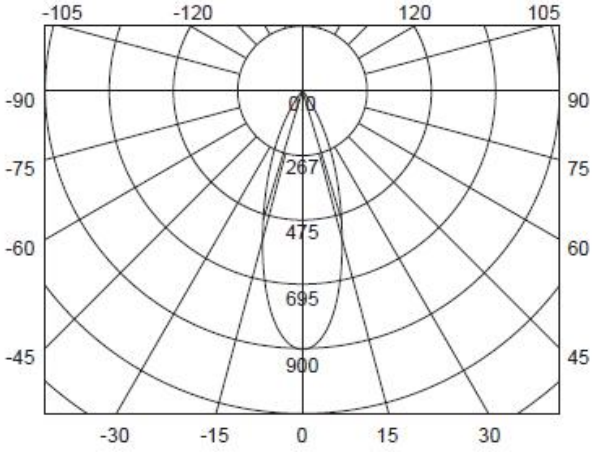

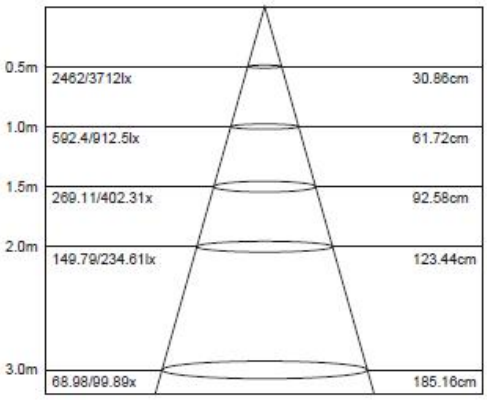

Technical Drawings（mm）

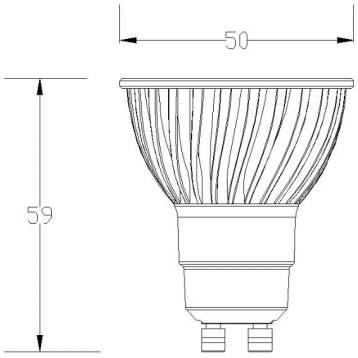

Packaging diagram

Inner Box

Middle Box

Outer Carton

Outer Carton Dimensions：(LxWxH): 580*285*185mm, Qty：100PCS

Cautions
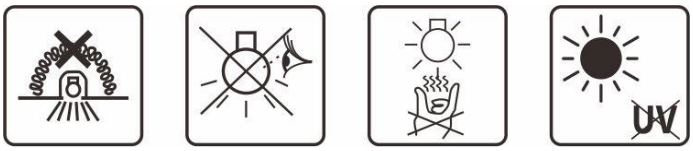
- Don’t touch the lamp when it is lighted
- Don’t use it in enclosed luminaire
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.