

Features

- The best LED Lamps to replace Halogen lamps
- HALED optical design with patent, comfortable light like halogen
- 6W, equal to 50W halogen lamp
- Dim to Warm by Traic Dimmer like Halogen
- High PF, Flicker free, Low UGR, CRI95
- Directional lighting source
- Replace traditional halogen lamps directly and easily
- Titanium appearance, Metal materials, Perfect Heat-sinking
- Used for all kinds of non-enclosed lighting fixtures
- Lifespan 40000 hrs, 5 years warranty





CE RoHS ErP

Applications:


- Commercial Lighting: Hotels, Restaurants, Museum, Theater, Bars, Cafes, Shop Etc.
- Villa, Residential buildings, House Lighting Etc.
- All non-enclosed Directional lighting fixtures

Technical data	
Part No.	WGU10 KC50T6-25637/ 25620
Wattage (W)	6W
Voltage (V)	AC200V-240V
Frequency (Hz)	50/60Hz
Power factor	>0.85
Dimmable	Dim to Warm
Color temperature (CCT)	2700K~2100K
Lumens(lm)	350
CRI	95
Beam angle (°)	24° / 36°
Luminous intensity(cd)	1050cd/ 800cd
Life Span(hrs)	40000hrs
Working temperatuer range	-20~+50°C
Storage temperature range	-20~+70°C
Gift Box Dimensions (LxWxH)	50*50*65mm
Inner Carton Dimensions (LxWxH)	270*110*80mm (10PCS)
Shipping Carton Dimensions(LxWxH)	580*285*185mm (100PCS)

Beam Angle(deg) & Illuminance (cd & lx) Diagram

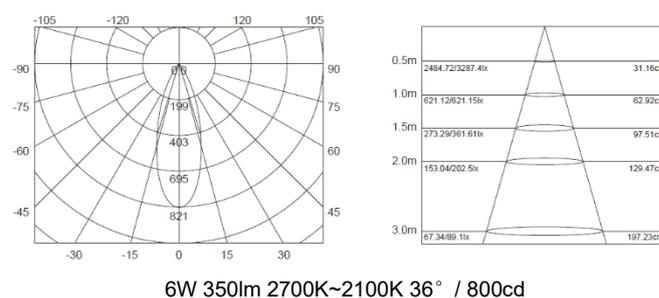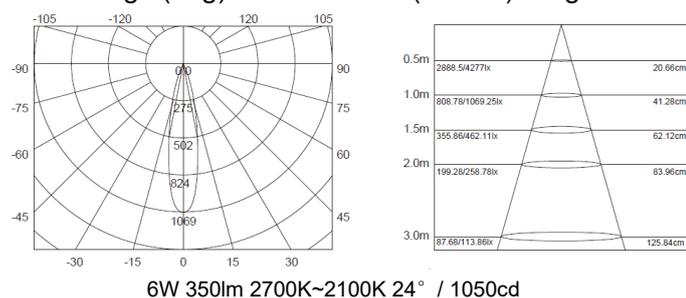

Technical Drawings (mm)



Package



Gift Box 50*50*65mm



Inner Carton 270*110*80mm(10PCS)




Shipping Carton 580*285*185mm(100PCS)

Installation /Mounting:

Please read the entire instruction manual before using the product and reserve it for future reference. We reserve the right for any error in text or image and any necessary change made to technical data. If you have any question regarding technical problems, please contact our Customer Services.

Replacement

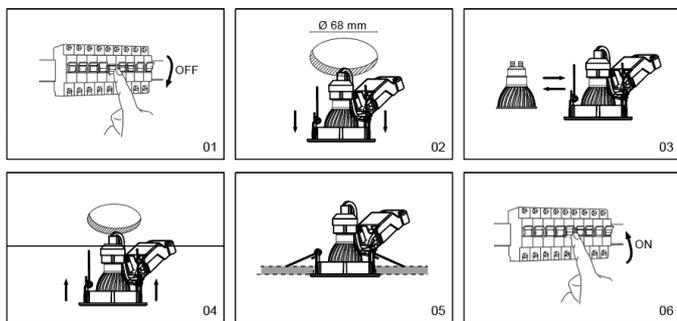

Cautions

- Don't touch the lamp when it is lighted
- Don't use it in enclosed fixtures
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.