

Features

- Driver inside, no need extra driver
- HALED optical design with patent, comfortable light like halogen
- Same lighting effect as halogen (G9) fittings
- Ultra-thin design 24mm, Used for all kinds of Ceiling (cabinet, furniture)
- 4W, equal to 35W halogen fitting (Follow new ErP)
- High PF, Flicker free, Low UGR, CRI90
- Directional lighting source
- Metal materials with Nickel color, Perfect Heat-sinking
- Cutting size 60mm
- Lifespan 25000 hrs, 3 years warranty



Ø 60mm

CE RoHS ErP


Surface ring: Nickel

Applications:


- Commercial Lighting: Hotels, Restaurants, Bars, Cafes, Shop etc.
- Home Lighting: Villa, Residential buildings, Indoor Lighting and Cabinet etc.

Technical data	
Part No.	CVC001W04-47019
Wattage (W)	4W
Voltage (V)	AC200V-240V
Frequency (Hz)	50/60Hz
Power factor	>0.5
Dimmable	Non-Dimmable
Color temperature (CCT)	3000K
Lumens(lm)	260
CRI	90
Beam angle (°)	36°
Luminous intensity(cd)	600cd
Life Span(hrs)	25000hrs
Working temperature range	-20~+50°C
Storage temperature range	-20~+70°C
Gift Box Dimensions (LxWxH)	75*75*35mm
Inner Carton Dimensions (LxWxH)	195*165*170mm (20PCS)
Shipping Carton Dimensions(LxWxH)	410*185*365mm (80PCS)

Beam Angle(deg) & Illuminance (cd & lx) Diagram

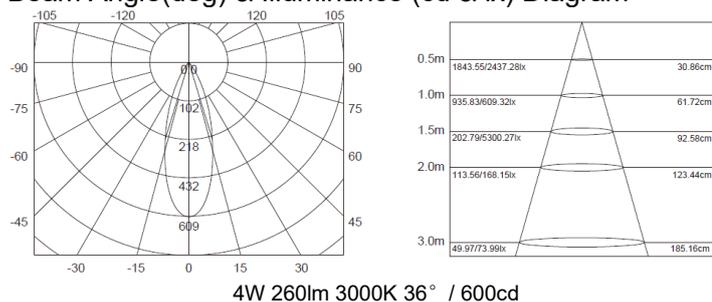

Technical Drawings (mm)

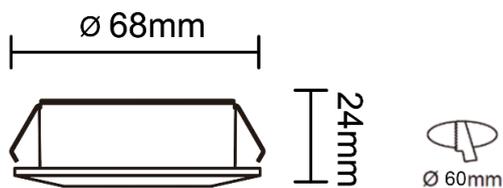

Package



Inner Box 75*75*35mm



Inner Carton 195*165*170mm(20PCS)




Shipping Carton 410*185*365mm(800PCS)


Installation /Mounting:

Please read the entire instruction manual before using the product and reserve it for future reference. We reserve the right for any error in text or image and any necessary change made to technical data. If you have any question regarding technical problems, please contact our Customer Services.

New installation

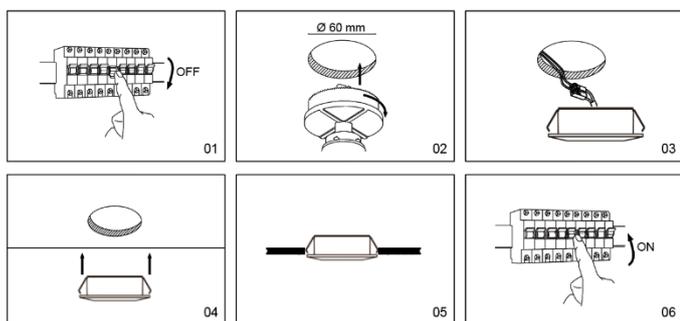

Replacement

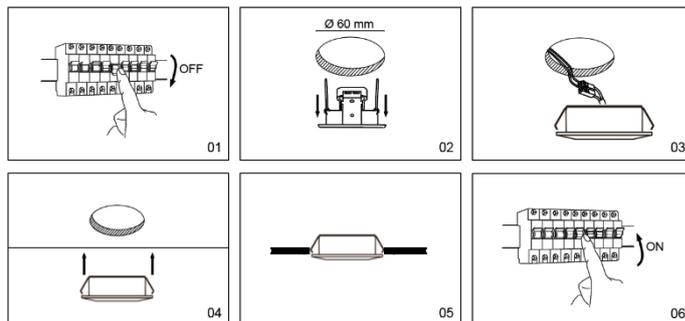

Cautions:

- Don't touch the lamp when it is lighted
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.