

Artemi Flex Strip Data Sheet

Single CCT Series (20W 48V 2100K/2700K/3000K/4000K/6000K 10mm)

*Features

- Exact colour selection in 2100K~ 6000K on black body line, high CRI 90
- High power 20W/m, high brightness 2400lm/m@4000K for general lighting
- High efficiency 120lm/W@4000K
- Comfortable and uniform light with no lighting dot by 3D SMD LED
- Brightness difference is less than 15% from end to end for 5m length
- 48V, high power efficiency
- Wide beam angle 180°
- Easy to cut
- 3M adhesive back tape
- Good dissipation, 25000hrs lifespan, 40000hrs long lifespan with heatsink



Technical data


Electrical specifications			
Part No.: @2100K	CTAS2C120G10F5-76004	EAN	4060574760041
Part No.: @2700K	CTASWC120G10F5-76005	EAN	4060574760058
Part No.: @3000K	CTAS3C120G10F5-76006	EAN	4060574760065
Part No.: @4000K	CTAS4C120G10F5-76007	EAN	4060574760072
Part No.: @6000K	CTAS6C120G10F5-76009	EAN	4060574760096
Wattage (W/m)	20	AC input voltage (V)	-
DC output voltage (V)	48	Power factor	-
Frequency (Hz)	-	Total harmonic distortion (THD)	-
Dimmable	Yes	Flicker-free	-
Max. no. of lamps on B16A circuit breaker	-	Max. no. of lamps on C10A circuit breaker	-
Max. no. of lamps on C16A circuit breaker	-		
Photometric specifications			
Colour temperature (CCT)	2100-6000K	CRI (Ra)	90
	85 @2100K		2050 @2100K
	95 @2700K		2150 @2700K
Luminous efficiency (lm/W)	100 @3000K	Luminous flux (lm/m)	2280 @3000K
	105 @4000K		2400 @4000K
	108 @6000K		2100 @6000K
Standard deviation of colour	≤3SDCM	Beam angle (°)	180°
UGR	-	LED Qty (pcs/m)	238
Mechanical specifications			
Housing material	FPC	Housing Colour	White
Optical cover/ lens material	-	Length/ diameter (mm)	5000
Width/ diameter (mm)	10	Height (mm)	1.45
Cut length (mm)	71.428	Product weight	60g
Lifespan			
Number of switching cycles	100000	L70/B50 service life at 25°C	40,000 hrs
L80/B10 service life at 25°C	25,000 hrs	L90/B10 service life at 25°C	20,000 hrs
Warranty period	5 Years with heat-sink		

Application parameters	
Working temperature range	-20~+60°C
Additional product specifications	
Type of installation	3M adhesive tape
Connection type	Connector


Storage temperature range	-20~+70°C
Location of installation	-
Protection type	IP20

- Power off before replacement
- Do not be in violation of any fire regulations when using
- Consult qualified electricians for technical support
- If the supply cord is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard


Dimensions: Cut dimension: 71.428mm

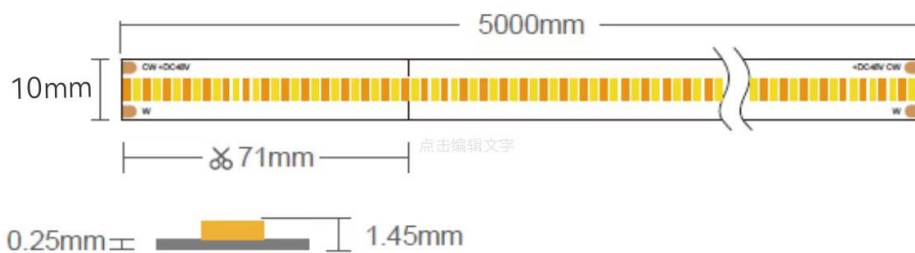


* Photometric Information (0.5m)

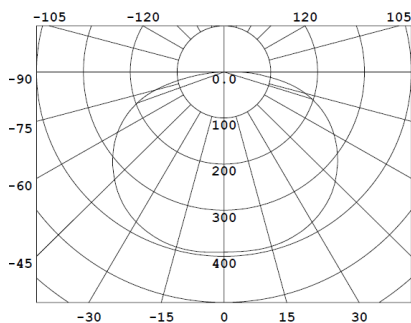

X axial

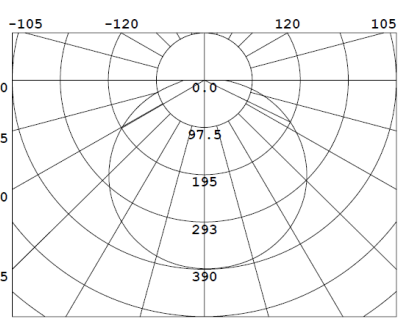

Y axial

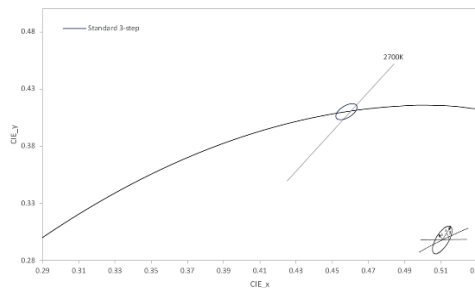

CIE Color Space

* Energy Label




CIVILIGHT

LED Strips




*Product & Wiring Connection & Cautions


Product connections

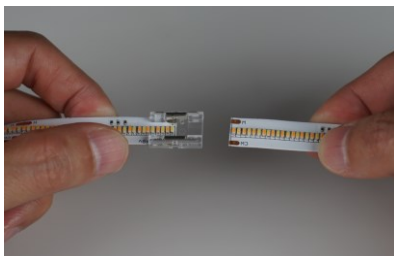

Insert each ends of led strips into the end of the connection terminal respectively, make sure the metal clip is on the same side as the metal solder pad of led strip.




After complete the insert, also make sure both ends of led strip are tightly connected.

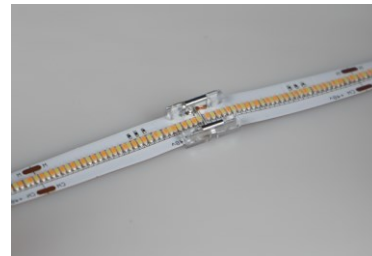

Press the metal clip down with the appropriate plier to ensure that the metal clip is inserted into the appropriate position ,and connection completed.

Wiring connections

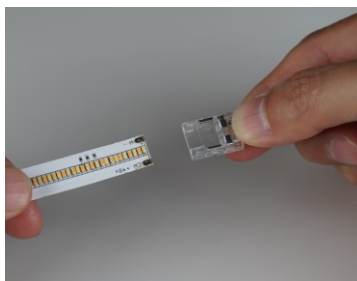


Insert one end of led strip and wire connector into both ends of the connection terminal respectively to ensure that the metal clip is on the same side as the metal solder pad of led strip.




Meanwhile make sure both ends are closely connected, Press the metal clip down with the appropriate plier to ensure that the metal clip is inserted into the appropriate position ,and connection completed.

Cautions

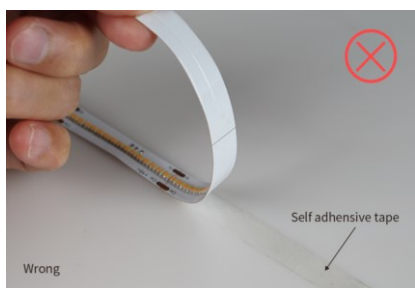


If the led strip needs to be torn up,please make sure that the self adhesive tape is torn with the led strip,otherwise the led strip will be damaged.


When install the led strip, please note the installation technique
The led strip can be bent, but not distorted, as shown below

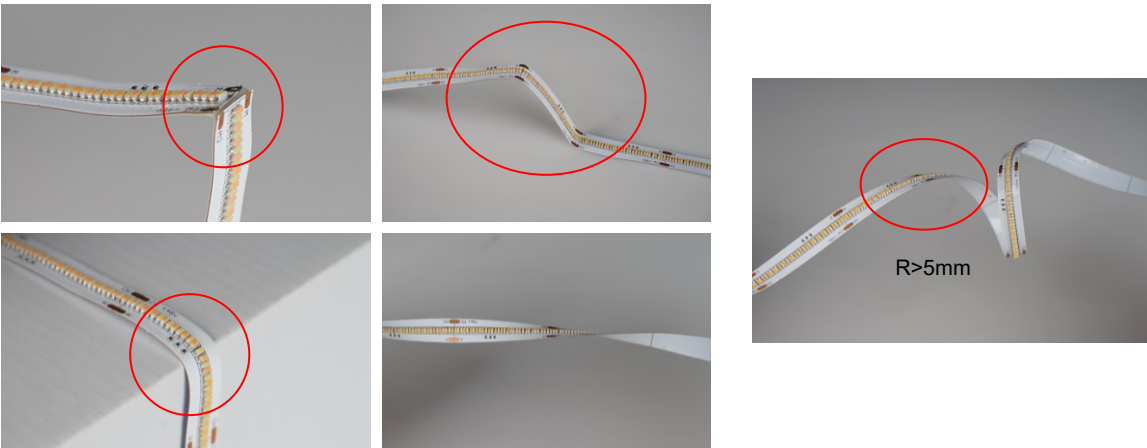


Distortion (Wrong)

Bend (Right)


 LED strips are low voltage products, you must use the power supply(transformer). Please don't connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.

 Clean up the installation surface and it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.


Wiring Diagram

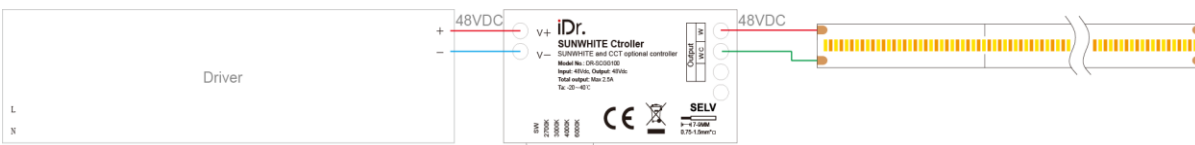


*Installation Step

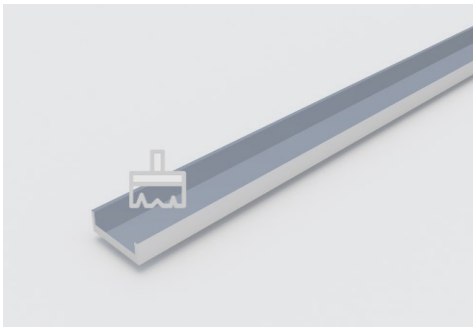


1. Clean

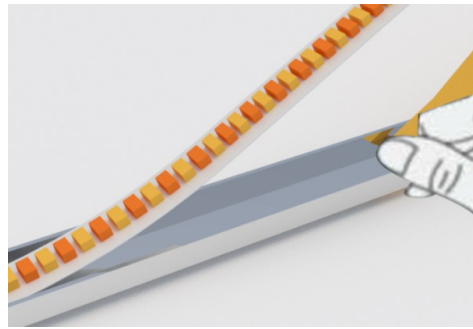

2. Peel off the adhesive tape and stick the strip

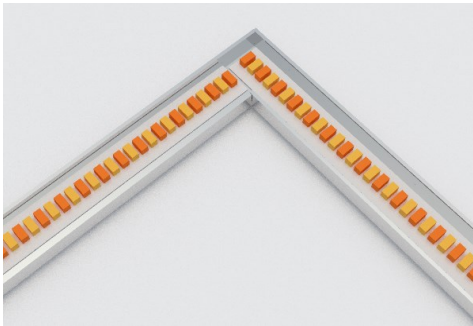

3. Vertical installation

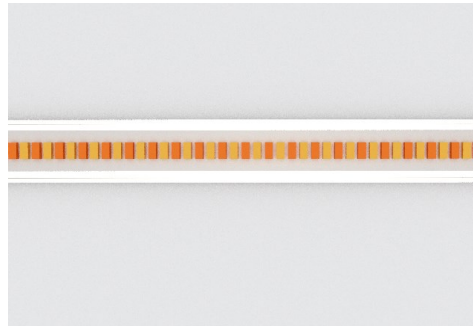

4. Done

*Accessories / Parts (Optional):



*Semi-transparent
Plastic Cover



*Connector Clamp



*Aluminum slot Clamp



*Aluminum slot



*Square plastic Cover