


CIVILIGHT

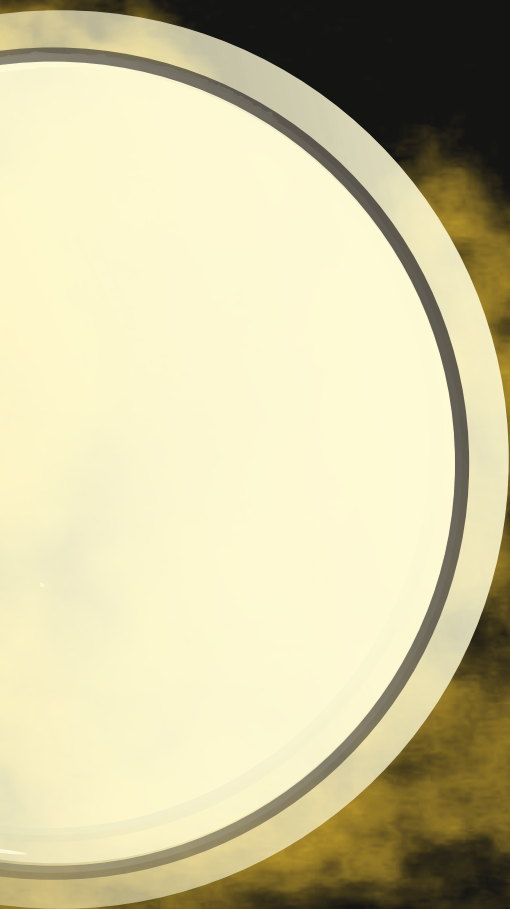

# Ceiling Light

Bauhaus-Style Design, Comfortable Light with Side Illumination  
Ultra-thin with a thickness of only 24mm, Easy Installation  
IP44/ IP65 Rated

# Ceiling Light

## Bauhaus-Style Design

based on the simple design, can create the various fashion styles and light effects by innovating in space.

## HCL by SUNWHITE® Technology

According to the needs of different environments or preferences of different people, the color temperature can adjustable from 2800K to 6000K, at the same time can adjustable the brightness

IP44/IP65 Rated




**Artemi Series (IP65)**



**Aris Series (ultra-thin)**

## HCL by SUNWHITE Technology


Frankfurt - Winter

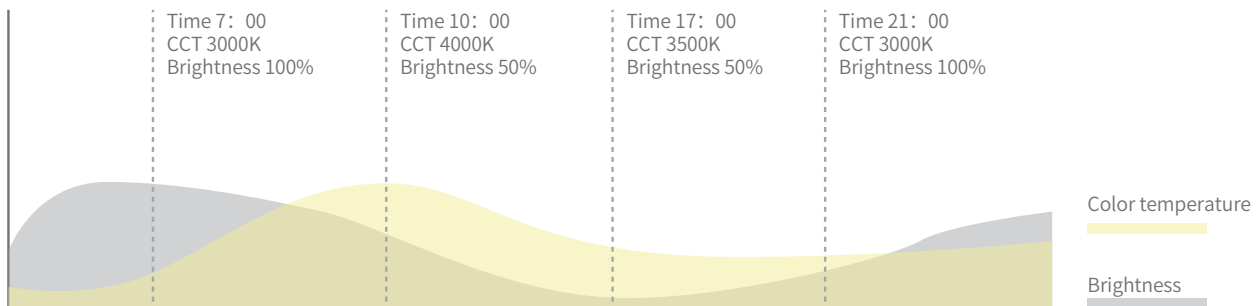

### SUNWHITE® Technology


Which enables automatic adjustment of both the color and brightness of the lights, without the need for an additional control system.

By combining SUNWHITE technology with auto-dimming brightness, the luminaire intelligently adjusts its output.  
Or connect with other dimming technology (wire and wireless)

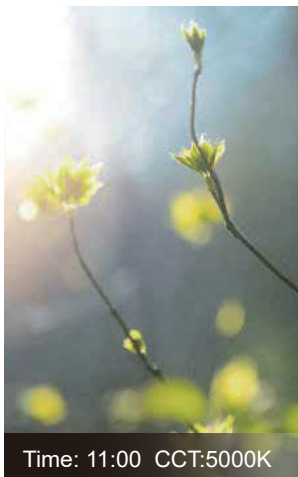


Time: 11:00 CCT:5000K

Spring

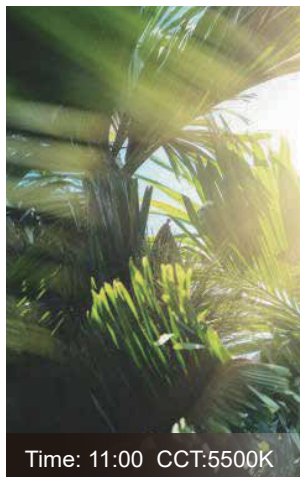

Time: 11:00 CCT:5500K

Summer

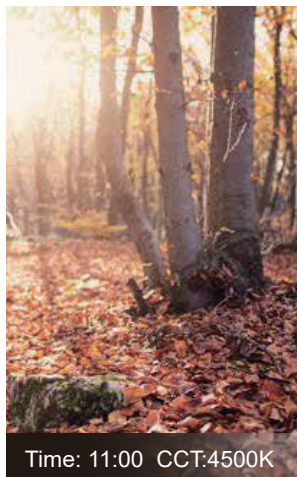

Time: 11:00 CCT:4500K

Autumn



Time: 11:00 CCT:4000K

Winter

Light change like sunlight by SUNWHITE Technology  
Automatically adjusting according to the season and time of day at your location.

For example:

It shifts to warm white in winter,  
Neutral white in autumn,  
And cool white in summer.

Similarly, it provides neutral or cool white light at midday,  
And warm white light in the evening.

## Safe, Easy

SUNWHITE dimming technology

Note: SUNWHITE requires no network connection or app, ensuring user data security.

It automatically synchronizes with local sunrise/sunset times.

Simple manual adjustments are accessible even for elderly or child users.

SUNWHITE requires no network connection or app, ensuring user data security.



It automatically synchronizes with local sunrise/sunset times. Simple manual adjustments are accessible even for elderly or child users.



# High-quality healthy light

Connecting with nature like sunlight

Healthy light promotes the growth of melatonin  
The CCT is as low as 2800K

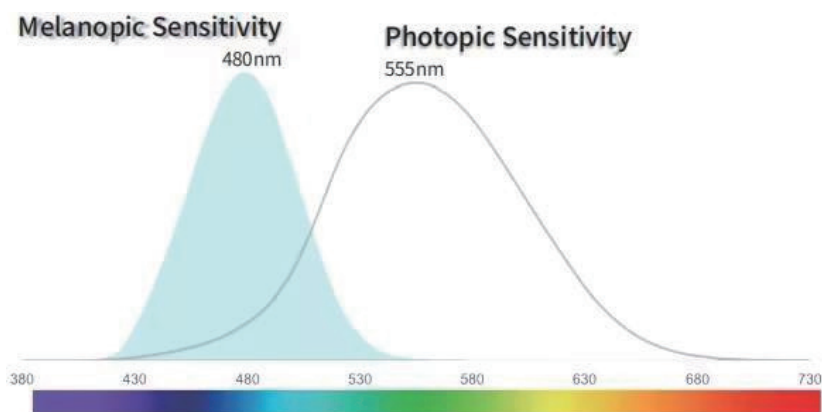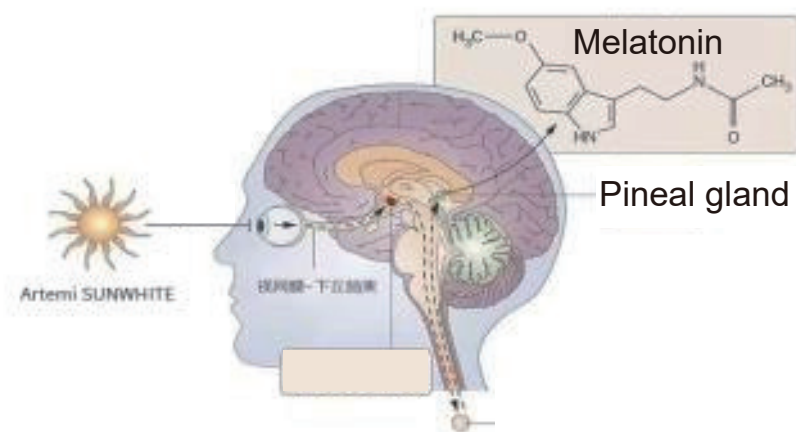

Melatonin is an amine hormone secreted by the human pineal gland. Due to its significant role in regulating sleep and circadian rhythms, it has been extensively studied and applied.

## Comfortable light by sideview

The light source adopts side-emitting technology, providing a comfortable and uniform light.

CRI 95 and up to 100lm/W efficiency




# CCT Adjustable

The desired color temperature can be adjusted through SUNWHITE, the remote control, and the dip switch.

SUNWHITE Technology Automatically adjust the CCT


(CCT)

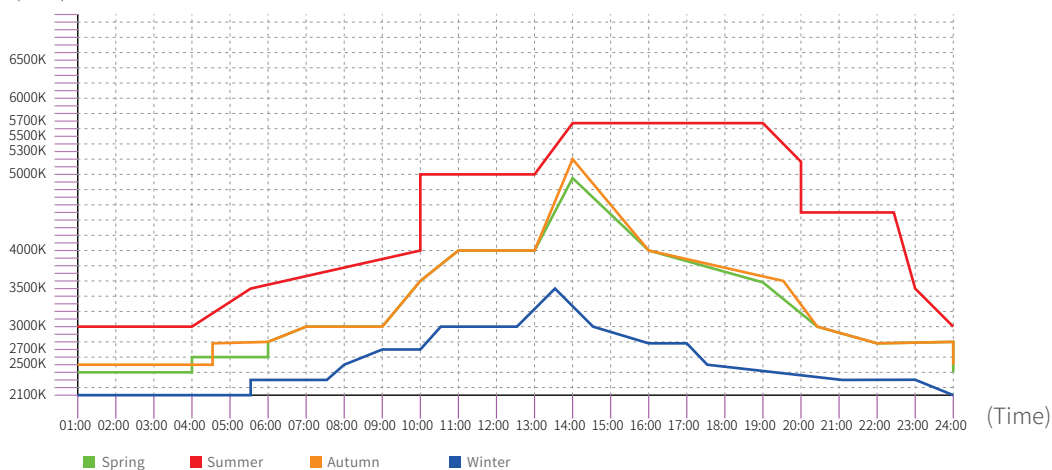

It can be adjusted according to customer needs.



Remote

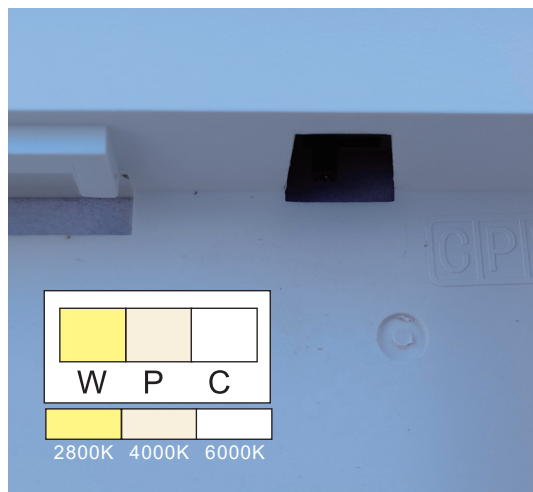

Select CCT by using the dip switch

# Ultra-thin

with a thickness of only 24mm



Ultra-thin design  
Only 2.4CM



Use LGP technology  
Low UGR and Up to  
120LM/W



# Easy installation (Driver inside)

Quick installation Fewa seconds to complete installation

1. Just fix the base
2. Driver inside Connect to the mains power supply
3. Rotate upwards for installation.



Driver inside






## Application




# Data


## Round style




-  Black
-  White
-  Silver




800



600



480



400



300



230







180


Power	Input	CCT (K)	Lumen	CRI	IP Rate	Size
12W	AC220~240V	2800~6000K	1400~1600lm	95	IP44	Φ180*24MM
18W	AC220~240V	2800~6000K	2100~2300lm	95	IP44	Φ230*24MM
24W	AC220~240V	2800~6000K	3050~3200lm	95	IP44	Φ300*24MM
32W	AC220~240V	2800~6000K	3600~3800lm	95	IP44	Φ400*24MM
36W	AC220~240V	2800~6000K	4300~4500lm	95	IP44	Φ480*24MM
45W	AC220~240V	2800~6000K	5400~5600lm	95	IP44	Φ600*24MM
64W	AC220~240V	2800~6000K	7500~7800lm	95	IP44	Φ800*24MM

# Data
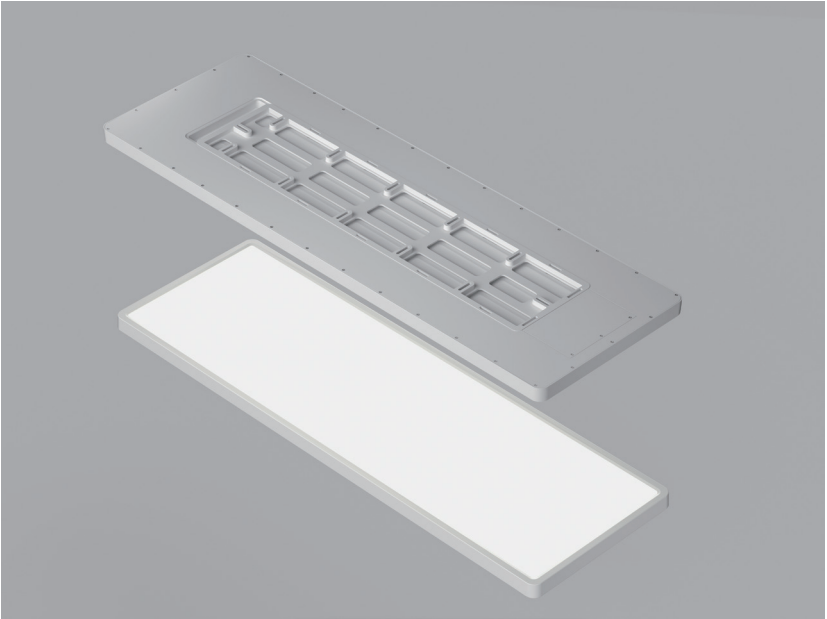
## Square style



-  Black
-  White
-  Silver

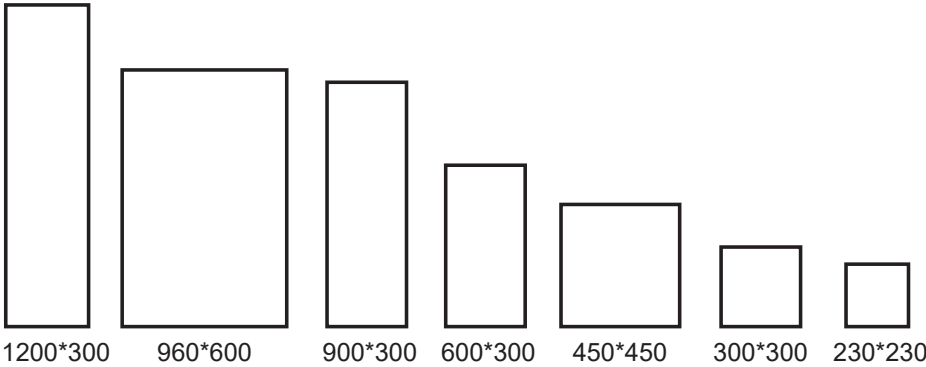


Power	Input	CCT (K)	Lumen	CRI	IP Rate	Size
12W	AC220~240V	2800~6000K	1400~1600lm	95	IP44	L230*W230*H24MM
18W	AC220~240V	2800~6000K	2100~2300lm	95	IP44	L300*W300*H24MM
24W	AC220~240V	2800~6000K	3050~3200lm	95	IP44	L450*W450*H24MM
32W	AC220~240V	2800~6000K	3600~3800lm	95	IP44	L600*W300*H24MM
36W	AC220~240V	2800~6000K	4300~4500lm	95	IP44	L900*W300*H24MM
45W	AC220~240V	2800~6000K	5400~5600lm	95	IP44	L960*W600*H24MM
64W	AC220~240V	2800~6000K	7500~7800lm	95	IP44	L1200*W300*H24MM

# Artemi Ceiling Light

1. Comfortable lighting, aesthetic design,
2. IP65 rated suitable for both indoor and outdoor
3. Use Can be used as a single light or multiple lights
4. Together can be installed as a wall lamp or ceiling light



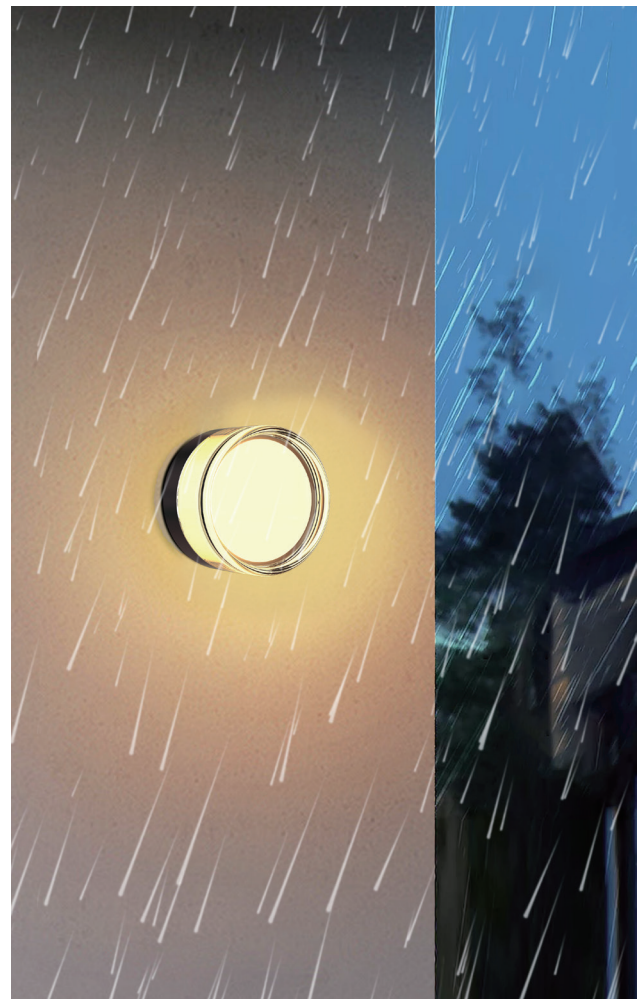


## Application



# Data

Round style






-  Black
-  White
-  Silver

Power	Input	CCT (K)	Lumen	CRI	IP Rate	Size
8W	AC220~240V	2800/ 4000/ 6000	800lm	95	IP65	Φ140*75MM
18W	AC220~240V	2800/ 4000/ 6000	1800lm	95	IP65	Φ230*70MM
24W	AC220~240V	2800/ 4000/ 6000	2400lm	95	IP65	Φ300*70MM
32W	AC220~240V	2800/ 4000/ 6000	3200lm	95	IP65	Φ400*70MM

# Data

Square style



-  Black
-  White
-  Silver

Power	Input	CCT (K)	Lumen	CRI	IP Rate	Size
8W	AC220~240V	2800/ 4000/ 6000	800lm	95	IP65	L130*W130*H75MM
18W	AC220~240V	2800/ 4000/ 6000	1800lm	95	IP65	L230*W230*H70MM
24W	AC220~240V	2800/ 4000/ 6000	2400lm	95	IP65	L300*W300*H70MM
32W	AC220~240V	2800/ 4000/ 6000	3200lm	95	IP65	L400*W400*H70MM



SUNWHITE CO.,LTD

Address: 5F, Unit 2, Building 7, Baishun Industrial Park, Makan, Xili,  
Nanshan, Shenzhen, China

Telephone: +86-755-86970016

E-mail: [market@sunwhite.cn](mailto:market@sunwhite.cn), [market@civilight.de](mailto:market@civilight.de)